

DSBI

DSBI SERIES DOUBLE SHEAR BEAM STAINLESS STEEL LOAD CELLS



Stainless steel double shear beam load cells suitable for building, for example, to make CE-M approved scales for high capacities or for weighing tanks and hoppers with the relevant accessories. High accuracy also with the expansion of the weighing structures.

CAPACITIES (kg): 10000, 20000, 30000.

17-4 PH stainless steel. IP68 protection. C4 precision class.

Working in cooperation with:

MWS LTD

UNIT 17 HUTCHINSON STREET - LE2 OBD - LEICESTER
Tel. 0044-1162426910 Fax. 0044-1162426911
andrew.clarke@mws.ltd.uk

The best solution
for advanced industrial
applications

TECHNICAL FEATURES

- C4 PRECISION CLASS
- 17-4 PH STAINLESS STEEL CONSTRUCTION
- IP68 PROTECTION
- MAX. CAPACITIES FROM 10000 TO 30000 kg
- SHIELDED CONNECTION CABLE
- TEST CERTIFICATE AVAILABLE UPON REQUEST


MAIN FEATURES

- Minimum load cell verification interval: $V_{min} = E_{Max} / 10.000$
- Combined error 0,03% of Full Scale Output (F.S.)
- Full Scale Output: 2mV/V +/- 0,1%
- Temperature effect on zero: 0,00116% /°C
- Temperature effect on full scale output: 0,00097% /°C
- Compensated Temperature Range: -10°C/+40°C
- Operating Temperature Range: -30°C/+85°C
- Creep error after 30 minutes: <0,02% F.S.
- Maximum tolerated excitation voltage: 15 VDC
- Input Resistance: $700 \pm 7 \text{ Ohm}$
- Output Resistance: $700 \pm 7 \text{ Ohm}$
- Zero Balance: +/- 1% F.S.
- Insulation Resistance: >5000 MOhm
- Safe Overload: 150% F.S.
- Ultimate Overload: 300% F.S.
- 6-wire shielded cable, 15m long

ATEX VERSION

- The CCATEX certificate makes the load cell suitable for use in hazardous areas with protection methods according to:
ATEX II 1G Ex ia IIC T6 (Ta -20÷+40°C) TX (Ta -20÷+65°C) Ga
ATEX II 1D Ex ta IIIC TX°C (Ta -20÷+40°C) TX°C (Ta -20÷+65°C) Da IP65.
The certificate includes the manual and the ATEX CE conformity declaration (available in EN, DE, FR, and IT).
- IMPORTANT: the certificate refers to the single load cell. For systems with more load cells, it is necessary to order one certificate for each load cell.

DETAIL 1

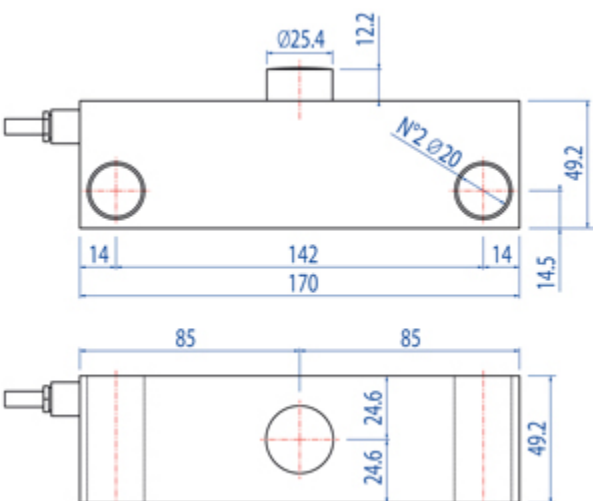

dimensions in mm

<u>Wiring Code</u>	
<u>Colour</u>	<u>Function</u>
GREEN	OUTPUT +
PURPLE	SENSE +
RED	INPUT +
WHITE	OUTPUT -
BLACK	INPUT -
GREY	SENSE -

VERSIONS

Models available

Code	Max (kg)	Masterpack 4 pcs
DSBI10	10000	DSBI10C
DSBI20	20000	DSBI20C
DSBI30	30000	DSBI30C



www.diniargeo.com



DINI AR GEO
FRANCE sarl
Nogent-sur-Marne

DINI AR GEO
GMBH
Sinsheim - Germany

DINI AR GEO
UK Ltd
Taunton - United Kingdom

DINI AR GEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China

DINI AR GEO
WEIGHBRIDGES
Calto (RO) - Italy



HEAD OFFICE

Via Della Fisica, 20
41042 Spezzano di Fiorano - Modena - Italy



MWS LTD

UNIT 17 HUTCHINSON STREET - LE2 OBD - LEICESTER

Tel. 0044-1162426910 Fax. 0044-1162426911

andrew.clarke@mws.ltd.uk

SALES AND TECHNICAL ASSISTANCE SERVICE